



THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HERewith IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF EICHENAUER, INC.

REVISIONS			
LTR/NO	DESCRIPTION	DATE	APPROVED
1	PRODUCTION RELEASE	1/20/09	SJH

NOTES:

1. DIMENSIONS IN INCHES
2. FLANGE MATERIAL: MILD STEEL
3. SHEATH MATERIAL: 1.4571
4. TERMINAL PINS: 10-32 WITH NUTS AND WASHERS AS SHOWN
5. COLD RESISTANCE 27.1  $\Omega$  +10%/-5% PER TUBE (25.8 - 29.8)
6. COLD RESISTANCE 18.1  $\Omega$  +10%/-5% BUSS TO BUSS (17.2 - 19.9)
7. TIGHTEN TOP NUTS TO 30 IN-LBS TORQUE
8. SHEATH WATT DENSITY: 88 W/IN<sup>2</sup>
9. UL FILE: E76225 MODEL: 2211

3X  $\varnothing$ .433 $\pm$ .005 TUBES EQUALLY SPACED ON A 1.500 B.C. DIA

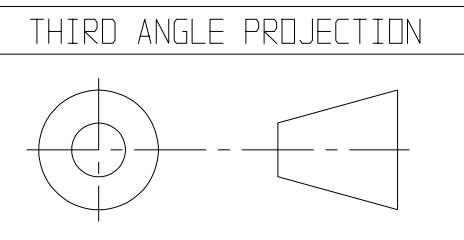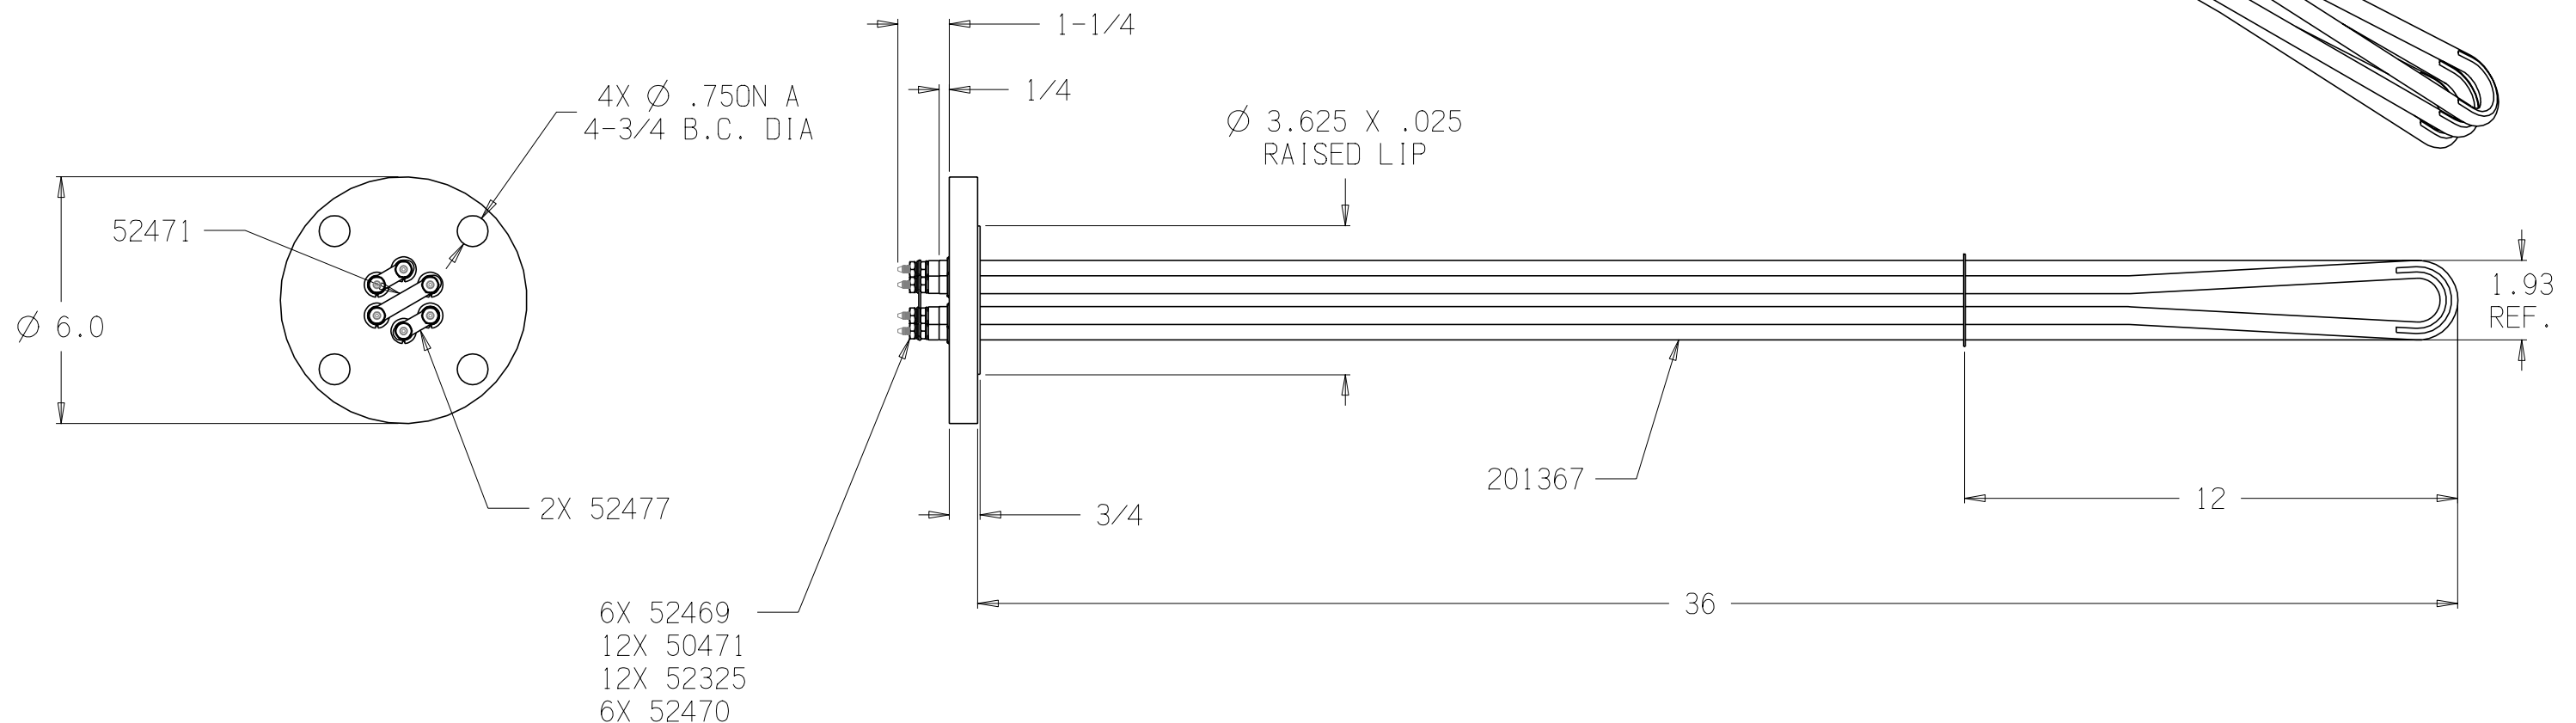

TOLERANCES UNLESS OTHERWISE SPECIFIED		<b>EICHENAUER INC.</b> 292 Sunapee St., Newport, NH 03773 TEL: 603-863-1454 FAX: 603-863-1248			
DEC	FRACTIONS				
.X $\pm$ .06			<b>FLANGED TUBULAR HEATER</b> <b>480V 25KW 3PH</b>		
.XX $\pm$ .025	$\pm$ 1/16	$\pm$ 1°			
.XXX $\pm$ .010			TITLE		REV.
APPROVALS DRAWN S. HEBERT CHECKED		DATE 1/20/09		SIZE B	FSCM NO. DWG. NO. <b>300556H</b>
		SCALE 1:4		SHEET 1 of 1	