



THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF HARTFORD EICHENAUER, INC.

REVISIONS			
LTR/NO	DESCRIPTION	DATE	APPROVED
1	PRODUCTION RELEASE	04/28/10	SJH

NOTES:

1. DIMENSIONS IN INCHES
2. FLANGE MATERIAL: STEEL
3. SHEATH MATERIAL: STAINLESS STEEL
4. TERMINAL PINS: #10-32 WITH NUTS & WASHERS AS SHOWN
5. COLD RESISTANCE: $45.2\Omega +10\%/-5\%$ (43.0 - 49.7) PER TUBE
6. TOTAL RESISTANCE: $30.1\Omega +10\%/-5\%$ (28.7 - 33.1) L1-L2, L2-L3, L1-L3
7. TIGHTEN TOP NUTS TO 25 IN-LBS TORQUE
8. SHEATH WATT DENSITY: 95 W/IN²
9. UL FILE: E76225 MODEL: 950-30-11
10. WIRING DIAGRAM: WDG-003

24X 52325 FLAT WASHERS
 24X 50471 HEX NUTS
 12X 52470 SPLIT WASHERS

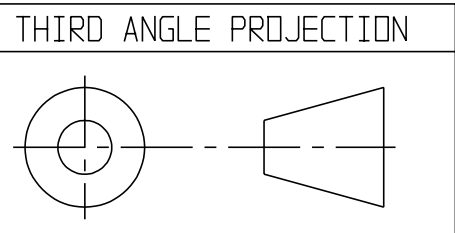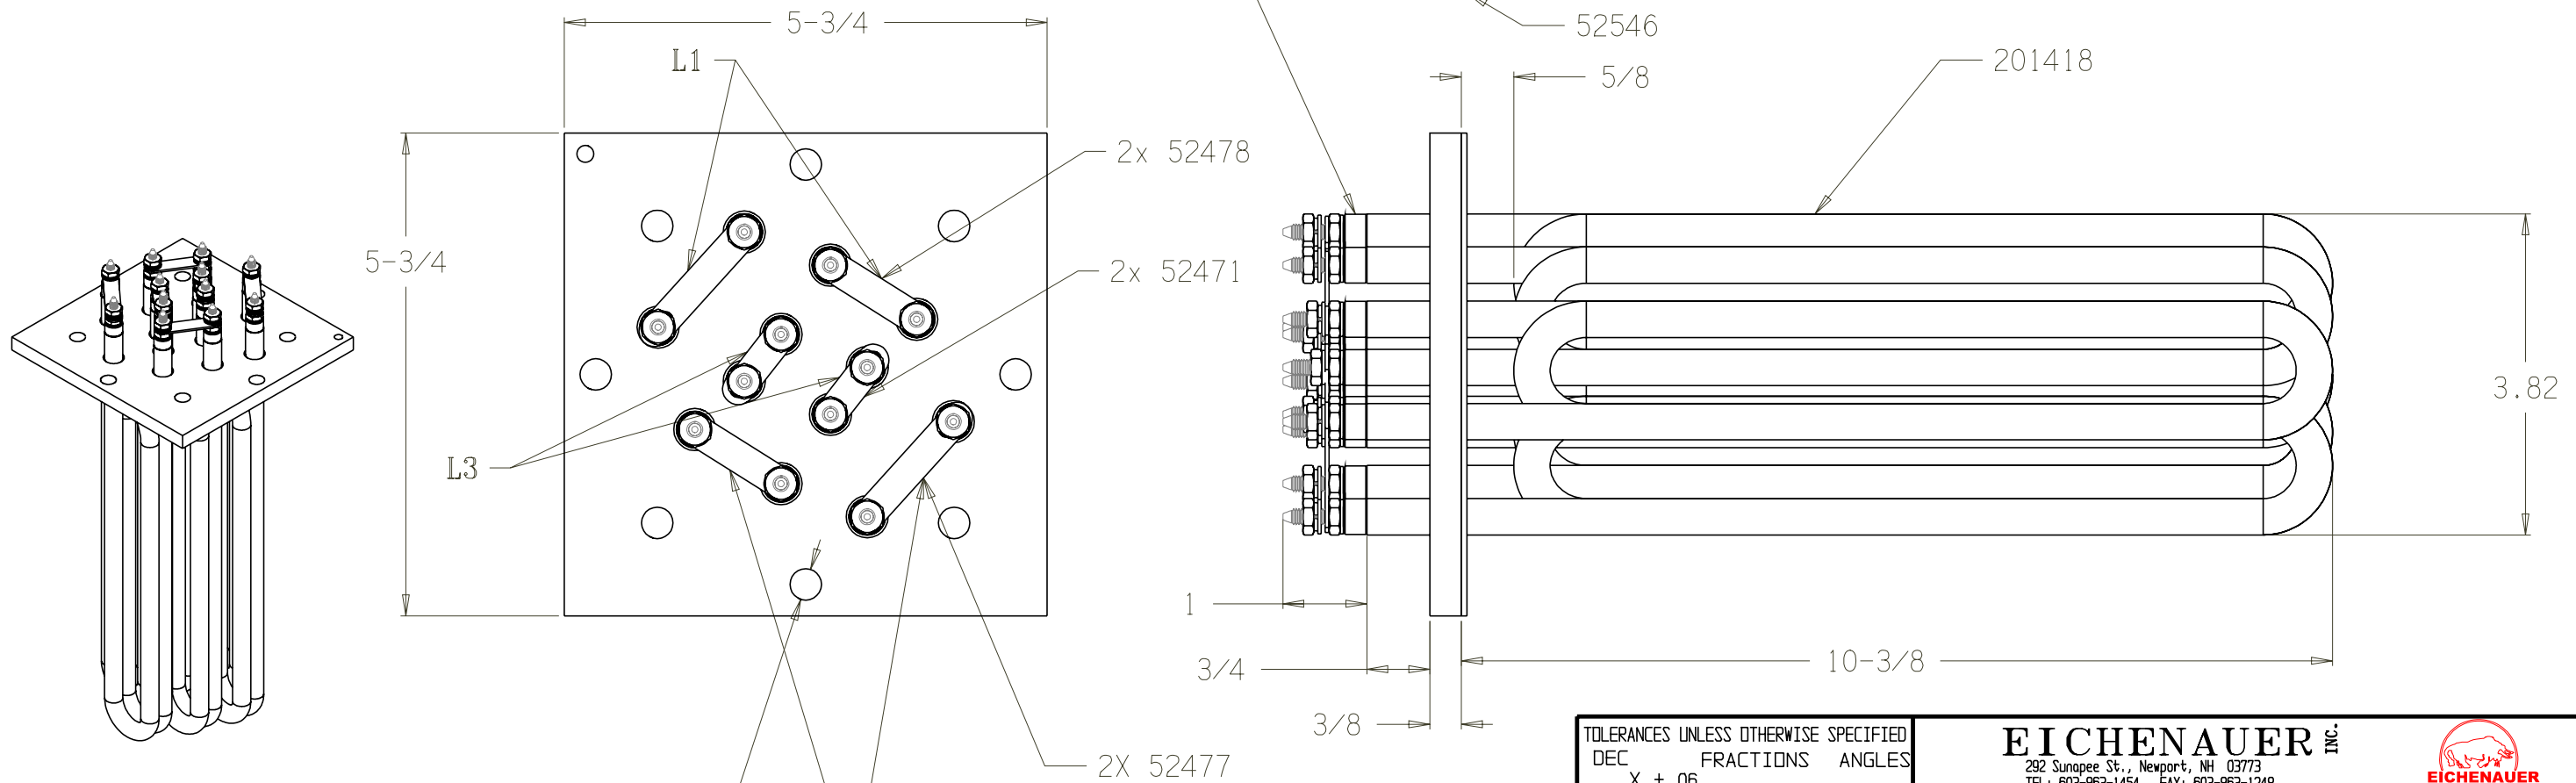

(8) \varnothing 3/8 HOLES ON 5.0 DIA BC

TOLERANCES UNLESS OTHERWISE SPECIFIED	
DEC	FRACTIONS ANGLES
.X \pm .06	
.XX \pm .025 \pm 1/16	\pm 1°
.XXX \pm .010	
APPROVALS	DATE
DRAWN S. HEBERT	04/28/10
CHECKED	

EICHENAUER INC.
 292 Sunapee St., Newport, NH 03773
 TEL: 603-863-1454 FAX: 603-863-1248

5-3/4" FLANGED IMMERSERS
480V 30KW 3PH
300576K

SIZE B FSCM NO. DWG. NO. REV. 1
 SCALE 1:2 SHEET 1 of 1